



Product Applications

Make it best solutions to cove lighting, decoration lighting, effect lighting, back light, background enhancement, entertainment

Product Features

- High quality SMD LED lamps as light engine, more reliable
- Powerful output with extra low lumen decay
- 80%~90% less energy saving
- superb color uniformity, even light distribution with wide angle
- Stylish design,robust aluminum body with excellent heat dissipation
- Easy to mount with metal clips, 3M tape, thread, glue
- Every 3 lamps or 6 lamps at cutting mark can be cut apart to fit specified length
- Dimmable through our handy dimmer (model: LD-MD, LD-RD)
- Comes in waterproof or non-waterproof connectors (option, sold in separate)

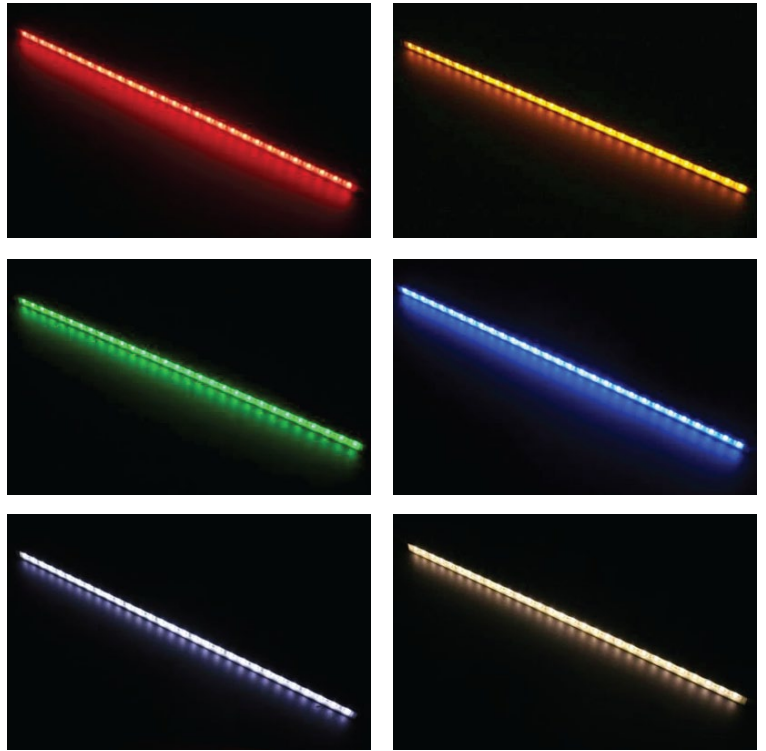

Product Specifications



Model No.	Emitting Color	Number LEDs	Voltage	Current	Max. Power	Radiation Angle (Typ.)	Luminous Intensity per lamp	Luminous Flux	Dimension (L*W*H)	IP rated
LD72-BW5050-R	Red	72LEDs/m	12VDC	1.44A/m	17.3W/m	120°	3600~4800 cmd	432 lm	1003*14*7 mm (40*0.56*0.28 in.)	IP 67 Indoor use Outdoor use
LD72-BW5050-Y	Yellow	72LEDs/m		1.44A/m	17.3W/m	120°	3600~4800 cmd	432 lm		
LD72-BW5050-G	Green	72LEDs/m		1.44A/m	17.3W/m	120°	5100~6600 cmd	846 lm		
LD72-BW5050-B	Blue	72LEDs/m		1.44A/m	17.3W/m	120°	3000~4200 cmd	540 lm		
LD72-BW5050-W	White (5000K~7000K)	72LEDs/m		1.44A/m	17.3W/m	120°	5400~7200 cmd	1404 lm		
LD72-BW5050-WW	Warm White (2500K~3500K)	72LEDs/m		1.44A/m	17.3W/m	120°	5400~6600 cmd	1296 lm		
LD72-BW5050-RGB	RGB	72LEDs/m		1.44A/m	17.3W/m	120°	1600 mcd (R) 2200 mcd (G) 1400 mcd (B)	144 lm 288 lm 180 lm		

Product Drawing

Waterproof type (12V, 18W)

