



40W LED Mini Street Light


80W-120W HID Replacement




Black / White / Silver color housing optional
 1~10V / PWM / Resistance dimming optional

Specifications

Item	Details
Power :	40W
Operating Voltage :	90-305VAC, 50/60Hz
Power Factor (PF) :	>0.9
Diver Efficiency :	>89%
Operating Humidity :	10%-90%RH
Operating Temp. :	-40°C to 50°C
CCT :	3000K / 4000K / 5000K / 5700K / 6500K
Luminous Flux :	4,800 ~ 5,000 lm (±5%)
LED Luminous Efficiency :	120 lm/W
CRI :	Ra >78
Optional Beam Angle :	50°*150° / 90°*100°
IP Rating :	IP66
IK Rating :	IK10
Lifetime (L70) :	50,000 hrs @25°C
Heat Radiator :	Unibody Aluminum
Lens :	PC
Fixture Dimension :	460*173*53 mm
Net Weight :	2.4 Kg

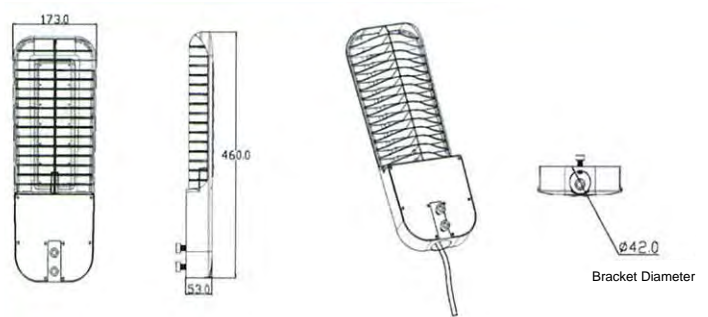


Connecting the Cable

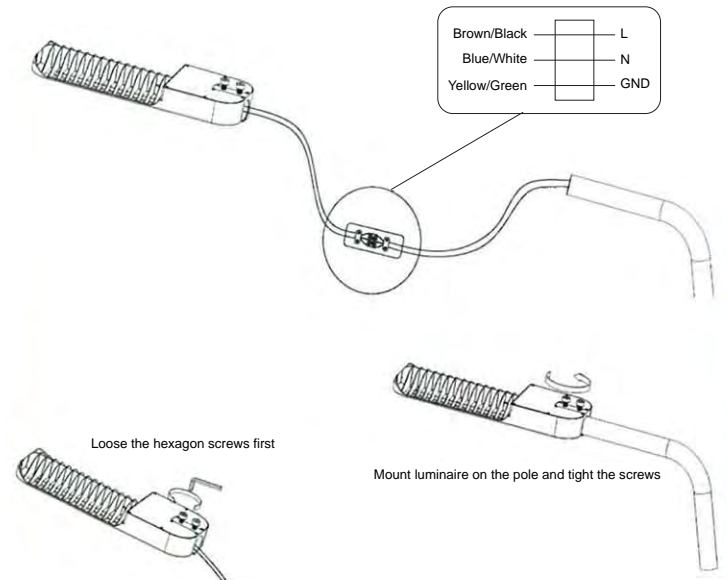

Loose the hexagon screws first

Mount luminaire on the pole and tight the screws



60-40 mm converter