



280W LED Street Light


800W-1,000W HID Replacement



Black / White / Silver / Bronze color housing optional
1~10V / PWM / Resistance dimming optional




Photocell

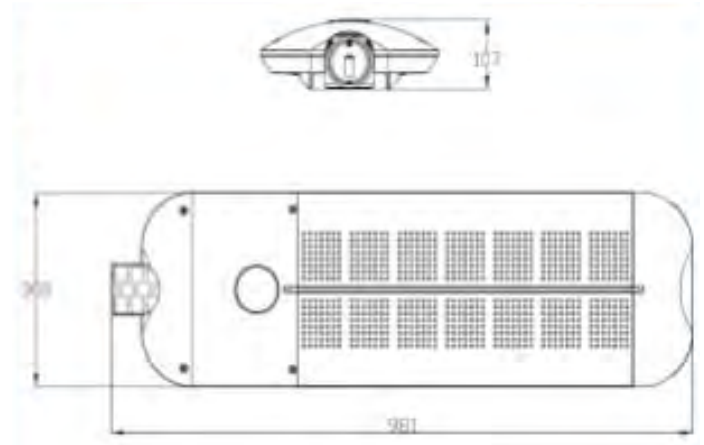


Specifications

Item	Details
Power :	280W
Operating Voltage :	90-305VAC, 50/60Hz
Power Factor (PF) :	>0.95
Diver Efficiency :	>94%
Operating Humidity :	10%-90%RH
Operating Temp. :	-40°C to 50°C
CCT :	3000K / 4000K / 5000K / 5700K / 6500K
Luminous Flux :	28,000 ~ 30,800 lm (±5%)
LED Luminous Efficiency :	100-110 lm/W
CRI :	Ra >75
Optional Beam Angle :	60°*150° / 70°*150° / 80°*150° / 90°*100° / 60° / 120°
IP Rating :	IP66
IK Rating :	IK10
Lifetime (L70) :	62,000 hrs @25°C
Heat Radiator :	Anodized Aluminum
Lens :	PC
Fixture Dimension :	981*300*107 mm
Net Weight :	13.5 Kg


Optional converters for different applications



60 mm to wall mount converter




21 in 1 converter



4 in 1 converter




Round to square converter



80-60 mm converter



Wall mount converter



60-40 mm converter